



IRON BUCK ANTLER MOUNT



After cutting the antlers, set them on the back plate. Place face plate over antlers, sliding the nose clip into the back plate clip at the same time. Place bolt into slot on back plate. Adjust antlers in desired position and tighten bolt until antlers are secure... Sometimes, it is necessary to cut off excess bone or use a longer bolt if the skull cap is too large.

Cut the narrowest point between the eye sockets and antler base.

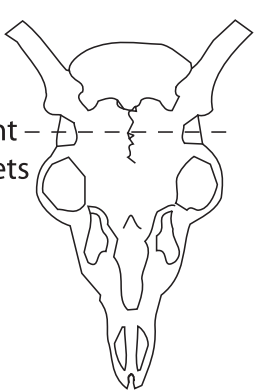

Cut straight down and straight across, as close to the antler base as possible. Be sure to cut behind eye socket.

