



THE WOBLER KIT

Parts List

| Item | Description | Quantity |
|------|---------------------|----------|
| 1 | Nylon Ring | 2 |
| 2 | _ x 1 _ Bolt | 1 |
| 3 | _ x 2 _ Bolt | 1 |
| 4 | _ Nylock Nut | 2 |
| 5 | Flat Washer | 4 |
| 6 | Base Casting | 1 |
| 7 | Left Pivot casting | 1 |
| 8 | Right Pivot Casting | 1 |

1. Put Nylon ring onto Base casting (as per picture 1).
2. Put the _ x 1 _ Bolt with flat washer through top hole of Base casting (as per picture 2).
3. Position the Left Pivot casting on top of the Base casting (as per picture 3) and secure the Bolt using a flat washer and the _ Nylock nut (as per picture 4).
4. Place the Nylon ring onto the face of the Left Pivot casting and secure the Right Pivot Casting using the _ x 2 _ Bolt and _ Nylock Nut, with a flat washer on both (picture 5).
5. The finished assembly should look like picture 6.

TRAPPER MUST ALWAYS MAINTAIN CONTROL OF THE TRAPHEAD WHILE USING THE WOBLER KIT, BY KEEPING A FIRM GRIP ON THE PROVIDED TRAP HANDLE. WHEN USING

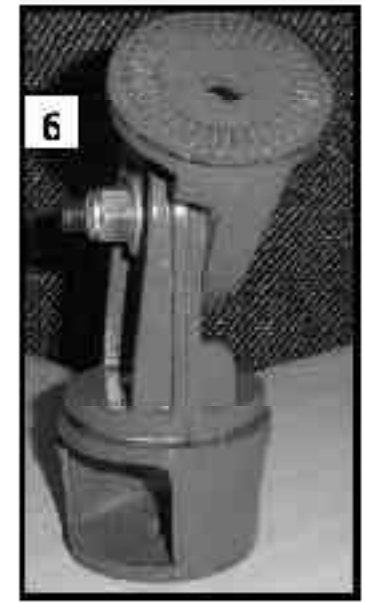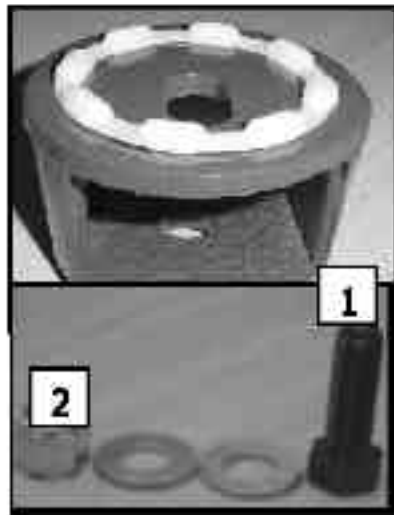

THE WOBLER KIT ON A DOUBLE TRAP, WE RECOMMEND USING THE TRAP ON THE LEFT HAND SIDE AS WELL AS ROLLING THE TRAP ON RIGHT HAND SIDE INTO RABBIT OR TEAL POSITION.